




MR 800.4

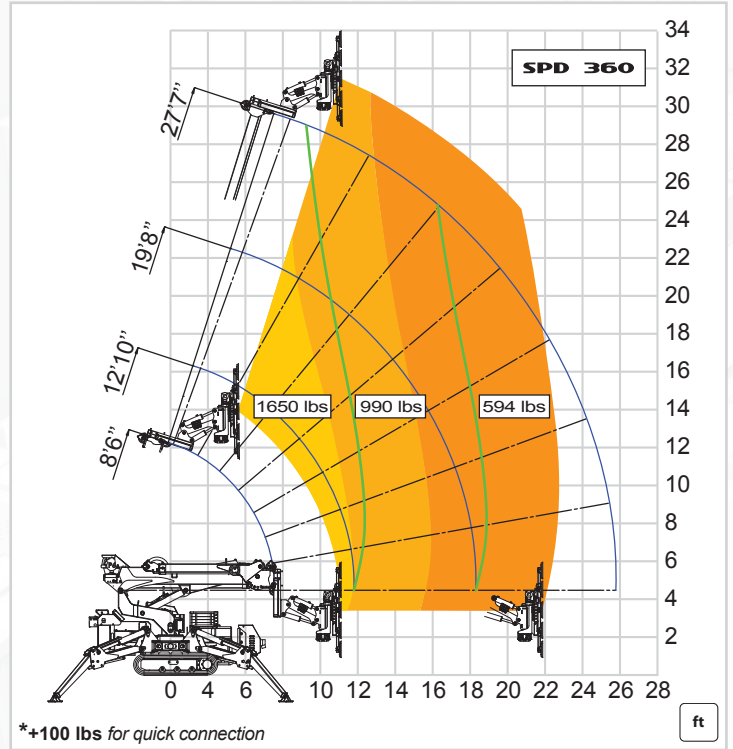

	24 vdc
	650 lbs*
	12"
	6+4
	1760 lbs
	45°/90°
	360°
	90°/90°

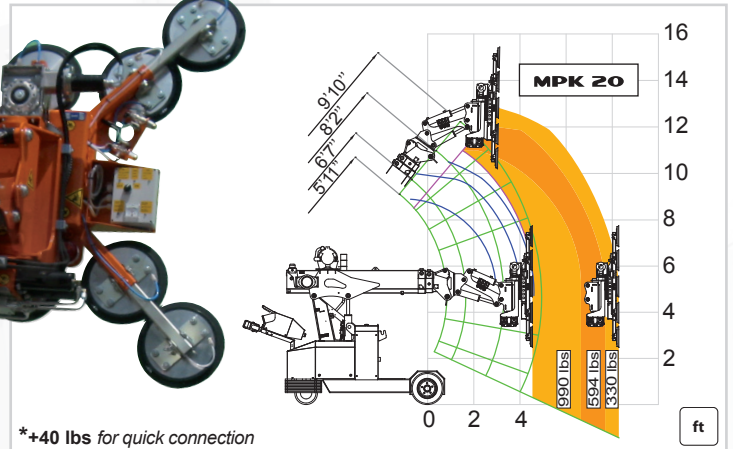

CE
EN 13155

